The Serenade fire pit is handmade by Dekko in North America. Ships with your choice of NG or LP burner, one decorative aggregate option and chrome On/Off key.

Size: 40"W x 19"H CSA/UL Approved Burner Assembly



	Manual Ignition	Electronic Ignition
BTU/Hr	65,000	140,000
Weight	110 lbs	110 lbs
Fuel Options	NG/LP	NG/LP

Optional Accessories:

Propane Tank Cover 16"W x 16"D x 21"H

Glass Wind Guard 30"D x 6"H

Vinyl Weather Cover

Powder Coated Aluminium Table Top 40"D

Colour Options







NATURAL

LIMESTONE

CLAY





SANDSTONE



CHARCOAL

ASH

Decorative Aggregate Options










IVORY BEACH STONE

SLATE BEACH STONE

BLACK LAVA ROCK



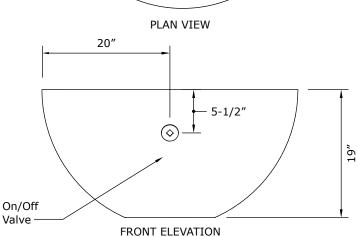




40" 15" SIDE ELEVATION

Manual Ignition

Clearances

Overhead solid structure: (Floor, overhang, pergola or screen)

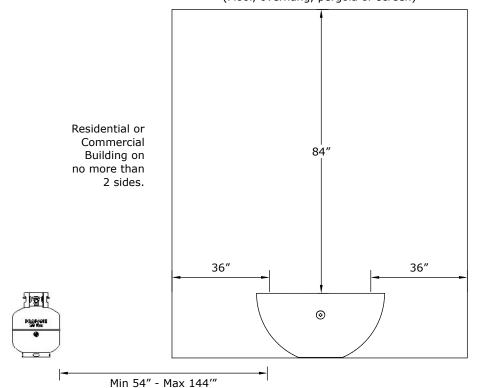

Solid structure or combustible on no more than 2 sides.


- 12" minimum clearance for noncombustible materials.

Note

Deck Installation - a deck insulation kit is required when installing the fire pit on a wood or composite deck. Kit includes basalt material and instructions.

Burner Assembly

24" Match Lit Burner

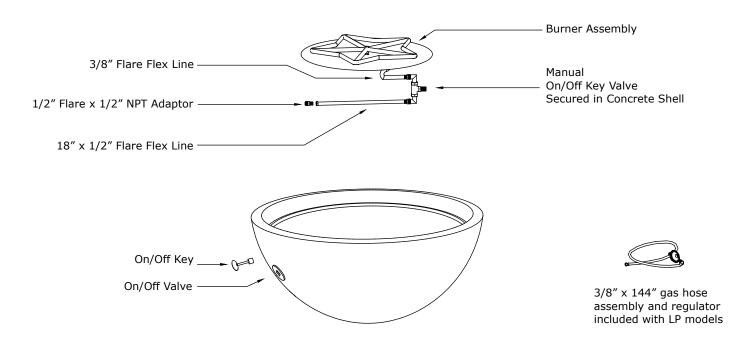

Electronic Ignition

Clearances

Overhead solid structure: (Floor, overhang, pergola or screen)

Residential or Commercial Building on no more than 2 sides. 36"

Solid structure or combustible on no more than 2 sides.
- 12" minimum clearance for

noncombustible materials.

Note: Electronic ignition burners require a fixed piping gas supply. Not for use with portable LP tanks.

Note:

Deck Installation - if installing fire pit on a wood or composite deck, it is required to use the deck insulation kit. Kit includes basalt material and instructions.

Burner Assembly

Electrical:

120V Outdoor receptacle required. Must be installed and grounded in accordance with local codes.

24" Electronic Ignition Burner

